



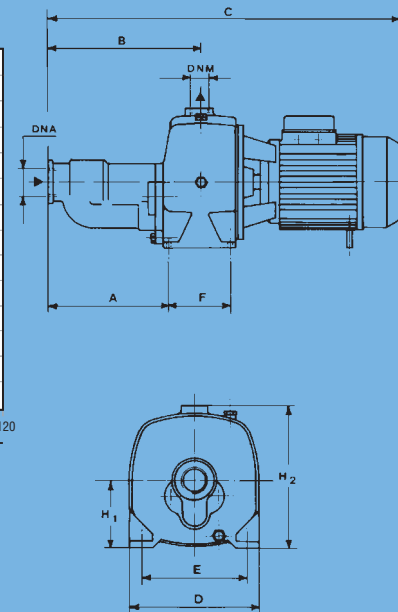

per caratteristiche-varianti costruttive pag. 70 - for features schedule-constructural variances pag. 70

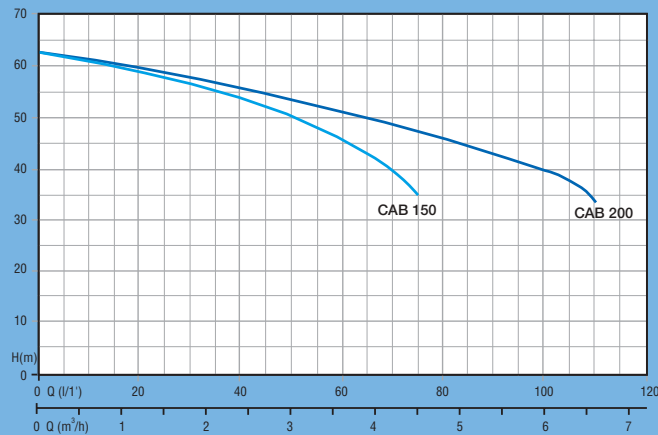

TIPO - TYPE		P ₂ nom.		P ₁ (kW) max.		AMPERE		Q = portata - débit - capacity - Fördermenge - caudal										
1 ~ 230 V - 50 Hz	3 ~ 230/400 V - 50 Hz	HP	kW	1 ~		3 ~		1 ~	3 ~	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8	6
				1 ~	3 ~	1 x 230 V	3 x 400 V	m³/h	l/1'	10	20	30	40	50	60	70	80	100
CAB 150	CAB† 150	1.5	1.1	1.65	1.65	8.2	3	61	59	57	54	50	46	40	-	-	-	-
CAB 200	CAB† 200	2.2	1.65	2.22	2.22	10.3	4.1	61	59.5	58	56	54	51	49	46	40	-	-

TIPO TYPE	Dimensioni mm Dimensions mm Dimensions mm Massstabelle mm Dimensiones mm							Dimensioni imballo mm Dimensions d'emballage mm Packing dimensions mm Verpackungsmasse mm Dimensiones emballaje mm				Peso Poids Weight Gewicht Peso		
	A	B	C	D	E	F	H1	H2	DNA	DNM	I	L	M	kg
CAB 150	204	257	596	220	177	105	112	240	1"1/2G	1"G	610	235	275	28.2
CAB 200	204	257	596	220	177	105	112	240	1"1/2G	1"G	610	235	275	28.7


• **serie CAB**
elettropompe autoadescenti
2 giranti



• **serie CAB**
electropompes auto-amorçantes
2 turbines




• **serie CAB**
self priming electric pumps
2 impellers



• **baureihe CAB**
Selbstansaugende Elektropumpen
2 Laufräder



• **serie CAB**
electrobombas autocebantes
2 rodetes



Dimensioni imballo
Dimensions d'emballage
Packing dimensions
Verpackungsmasse
Dimensiones imballaje

ELETTROPOMPE

AUTOADESCANTI

self priming electric pumps