






CM 150

CM 50





per caratteristiche-varianti costruttive pag. 70 - for features schedule-constructural variances pag. 70

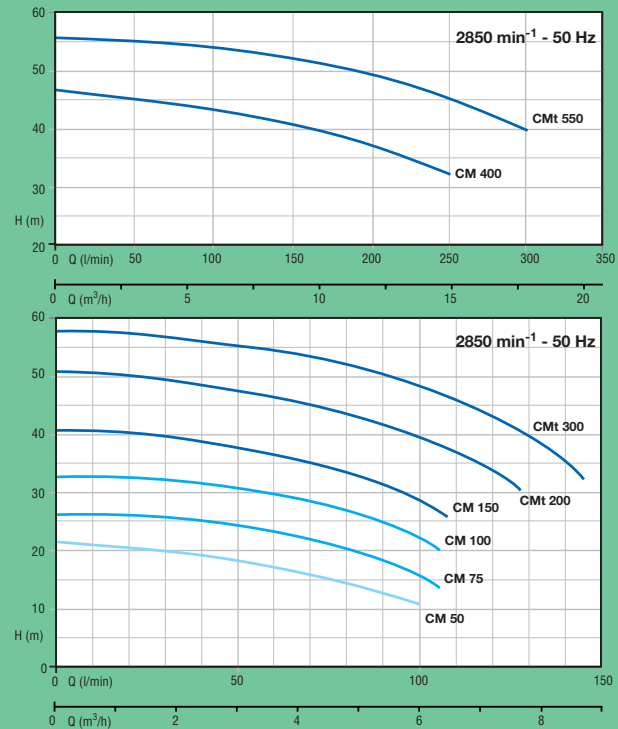

TIPO - TYPE		P ₂ nom.	P ₁ (kW) max.		AMPERE		Q = portata - débit - capacity - Fördermenge - caudal															
1 ~	3 ~		1 ~	3 ~	1 ~	3 ~	Prevalenza manometrica totale in m. C.A. Hauteur manométrique totale en m. - Total head in meters w.c. Förderhöhe m. - Altura de impulsión manométrica total en m.															
230 V - 50 Hz	230/400 V 50 Hz	HP/kW									m³/h	0.6	1.2	1.8	2.7	3.6	4.5	5.4	6.3	7.2	8.4	12
				1 x 230 V		3 x 400 V		l/1'	10	20	30	45	60	75	90	105	120	140	200	250	300	
CM 50	CMt 50	0.5/0.37	0.59	0.65	2.8	1.1	21.5	21	19	17.5	16	14	12									
CM 75	CMt 75	0.8/0.59	0.9	0.94	4.5	1.7	26.5	26	25	23.5	22	20	17.5	14								
CM 100	CMt 100	1/0.74	1.16	1.17	5.7	2	33	32.5	31.5	30.5	29.5	27.5	25	21								
CM 150	CMt 150	1.5/1.1	1.85	1.85	8.8	3.4	40.5	40	39	38	37	34.5	31	27.5								
-	CMt 200	2.2/1.65	-	2.30	-	4.2	50.5	50	49	47.5	46	44.5	42	39	35							
-	CMt 300	3/2.2	-	2.85	-	5.2	58.5	58	57	56	55	54	51	48	44	35						
CM 400	CMt 400	4/3	4.65	3.80	21	6.8	46.5	46.3	46.2	46	45.2	44.8	43.5	42.9	42	41.1	37.5	32.5				
-	CMt 550	5.5/4	-	5.20	-	9.6	56.1	55.8	55.7	55	54.9	54.9	54.5	53.9	53.5	52.1	50	46	40			

TIPO TYPE	Dimensioni mm Dimensions mm Dimensions mm Massabelle mm Dimensiones mm						Dimensioni imballo mm Dimensions d'emballage mm Packing dimensions mm Verpackungsmasse mm Dimensiones embalaje mm						Peso Poids Weight Gewicht Peso	
	A	B	C	D	E	F	H1	H2	DNA	DNM	I	L		M
CM 50	95	44	265	150	110	160	82	202	1" G	1" G	290	175	225	9
CM 75	110	45	300	180	140	185	97	234	1" G	1" G	325	200	265	12.7
CM 100	110	45	300	180	140	185	97	234	1" G	1" G	325	200	265	14
CM 150	117	45	348	220	180	225	115	285	1" G	1" G	370	240	315	22.5
CMt 200	117	45	348	220	180	225	115	285	1" G	1" G	370	240	315	23
CMt 300	117	45	348	220	180	225	115	285	1" G	1" G	370	240	315	23.5
CM 400	108	58	425	240	190	250	133	323	2" G	1" 1/4 G	440	270	360	39.8
CMt 550	108	58	425	240	190	250	133	323	2" G	1" 1/4 G	440	270	360	39.8

- **serie CM**
elettropompe centrifughe
1 girante
- **serie CM**
electropompes centrifuges
1 turbine
- **serie CM**
centrifugal electric pumps
1 impeller
- **baureihe CM**
Kreisel-Elektropumpen
1 Laufrad
- **serie CM**
electrobombas centrifugas
1 rodetes



Dimensioni imballo
Dimensions d'emballage
Packing dimensions
Verpackungsmasse
Dimensiones embalaje

CENTRIFUGHE

centrifugal electric pumps