



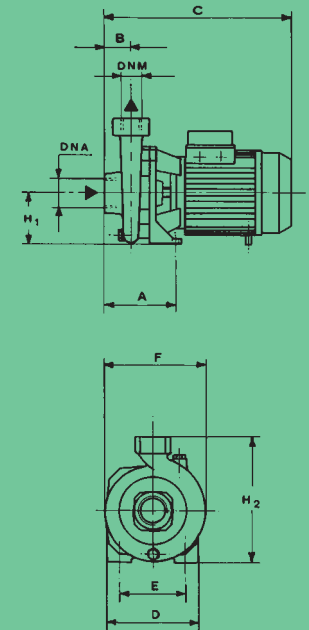


per caratteristiche-varianti costruttive pag. 70 - for features schedule-constructural variances pag. 70

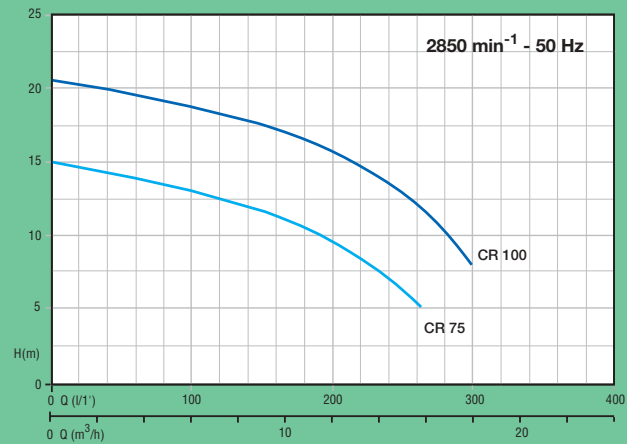

TIPO - TYPE		P <sub>2</sub> nom.		P <sub>1</sub> (kW) max.		AMPERE		Q = portata - débit - capacity - Fördermenge - caudal							
1 ~	3 ~					1 ~	3 ~	m³/h	2.4	4.8	7.2	9.6	12	14.4	16.8
230 V - 50 Hz	230/400 V - 50 Hz	HP	kW	1 ~	3 ~	1 x 230 V	3 x 400 V	l/1'	40	80	120	160	200	240	280
<b>CR 75</b>	<b>CR† 75</b>	0.8	0.59	0.73	0.83	3.4	1.5	14.5	13.5	12.5	11.3	9.5	7	-	
<b>CR 100</b>	<b>CR† 100</b>	1	0.74	1.14	1.2	5.3	2.4	20	19.2	18.5	17.3	15.5	13.5	10.5	

TIPO TYPE	Dimensioni mm Dimensions mm Dimensions mm Masstabelle mm Dimensiones mm						Dimensioni imballo mm Dimensions d'emballage mm Packing dimensions mm Verpackungsmasse mm Dimensiones embalaje mm						Peso Poids Weight Gewicht Peso	
	A	B	C	D	E	F	H1	H2	DNA	DNM	I	L	M	kg
<b>CR 75</b>	120	45	308	155	115	170	97	222	1"1/2G	1"1/4G	325	200	265	12.2
<b>CR 100</b>	120	45	308	155	115	170	97	222	1"1/2G	1"1/4G	325	200	265	13.5

- **serie CR**  
elettopompa centrifuga a girante aperta
- **serie CR**  
electropompe centrifuge à turbine ouverte
- **serie CR**  
open impeller centrifugal electric pump
- **baureihe CR**  
Kreisel-Elektropumpen mit offenem Laufrad
- **serie CR**  
electrobomba centrifuga de rodete abierto



# CENTRIFUGHE

centrifugal electric pumps