



CSt 550/4



CSt 400/3

CS 200/2

CSB 150/2




per caratteristiche-varianti costruttive pag. 70 - for features schedule-constructural variances pag. 70

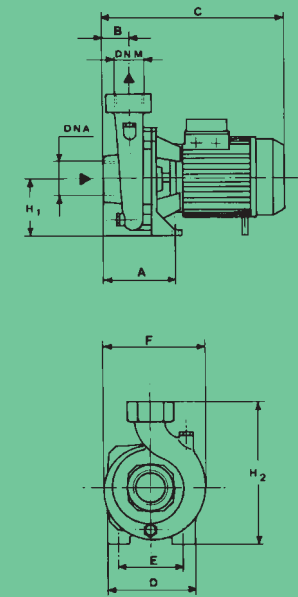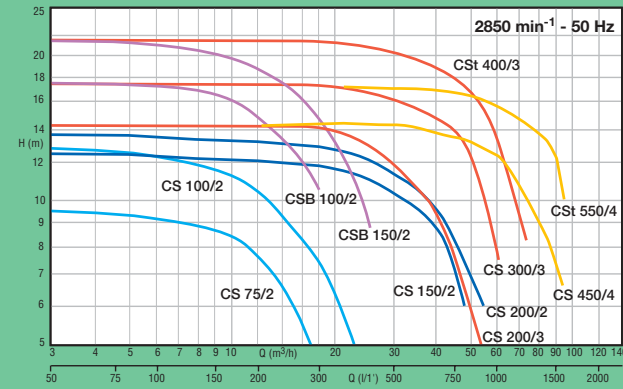

TIPO - TYPE		P <sub>2</sub> nom.	P <sub>1</sub> (kW) max.	AMPERE		Q = portata - débit - capacity - Fördermenge - caudal																		
1 ~	3 ~			1 ~	3 ~	m³/h	0	3	6	9	12	15	18	24	30	36	42	48	54	60	72	84	96	
230 V - 50 Hz	230/400 V - 50 Hz	HP/kW	1 ~	3 ~	1 x 230 V	3 x 400 V																		
<b>CS 75/2</b>	<b>CSt 75/2</b>	0.8/0.59	0.63	0.7	2.9	1.3	9.5	9.4	9.2	8.5	7.3	6	4.2											
<b>CS 100/2</b>	<b>CSt 100/2</b>	1/0.74	0.92	1.05	4.3	2.3	12.6	12.5	12.3	11.5	10.3	9.3	7.5											
<b>CS 150/2</b>	<b>CSt 150/2</b>	1.5/1.1	1.85	1.8	8.8	3.3	12.3			12.2	11.9	11.8	11	10.2	9.1	7.7	6							
<b>CS 200/2</b>	<b>CSt 200/2</b>	2/1.5	2.1	2.1	10	3.9	13.8			13.6	13.3	13.1	12.4	11.6	10.6	9.4	7.8	6						
<b>CSB 100/2</b>	-	1/0.74	1.23	-	6	-	17.5	17.5	17.5	16.7	15.2	13.2	10.5											
<b>CSB 150/2</b>	<b>CSBt 150/2</b>	1.5/1.1	1.78	1.65	8.5	3	21.5			21.5	20.6	19.2	17.5	15.3	8.8									
<b>CS 200/3</b>	<b>CSt 200/3</b>	2/1.5	2.35	2.15	11	3.6	14.2			14.2	14.2	13.8	11.8	11.7	9.9	7.8	4.8							
<b>CS 300/3</b>	<b>CSt 300/3</b>	3/2.2	3.3	2.9	15	4.9	17.5			17.5	17.5	17.2	16.4	15.3	14.2	12.3	9.9	7.5						
-	<b>CSt 400/3</b>	4/3	-	4	-	6.7	21.5			21.5	21.5	21.4	20.6	19.9	18.9	17.7	15.9	13.5	8.3					
<b>CS 450/4</b>	<b>CSt 450/4</b>	4/3	3.7	3.6	18	6.2	13.5						14.3	14.1	13.9	13.4	12.8	12.1	10.3	8.3	6.1			
-	<b>CSt 550/4</b>	5.5/4	-	-	-	8.8	17						17.5	17.3	17.1	16.8	16.3	15.7	14.4	12.2	10			

TIPO TYPE	Dimensioni mm Dimensions mm Dimensions mm Massstabelle mm Dimensiones mm							Dimensioni imballo mm Dimensions d'emballage mm Packing dimensions mm Verpackungsmasse mm Dimensiones embalaje mm					Peso Poids Weight Gewicht Peso kg	
	A	B	C	D	E	F	H1	H2	DNA	DNM	I	L		M
<b>CS 75/2</b>	127	45	315	155	115	178	97	247	2" G	2" G	340	195	280	14.2
<b>CS 100/2</b>	127	45	315	155	115	178	97	247	2" G	2" G	340	195	280	15.5
<b>CS 150/2</b>	150	53	370	180	140	218	115	285	2" G	2" G	390	230	325	23.3
<b>CS 200/2</b>	150	53	370	180	140	218	115	285	2" G	2" G	390	230	325	24.3
<b>CSB 100/2</b>	130	70	365	180	130	195	90	240	2" G	2" G	390	230	325	18.2
<b>CSB 150/2</b>	130	70	365	180	130	195	90	240	2" G	2" G	390	230	325	19.1
<b>CS 200/3</b>	160	80	455	200	140	225	112	292	3" G	3" G	480	245	330	28.3
<b>CS 300/3</b>	160	80	455	200	140	225	112	292	3" G	3" G	480	245	330	31.5
<b>CSt 400/3</b>	160	80	455	200	140	225	112	292	3" G	3" G	480	245	330	31.6
<b>CS 450/4</b>	165	85	480	220	160	250	130	330	4" G	4" G	510	275	365	41.1
<b>CSt 550/4</b>	165	85	480	220	160	250	130	330	4" G	4" G	510	275	365	41.1

- **serie CS**  
elettropompe centrifughe per irrigazioni a scorrimento
- **serie CS**  
electropompes centrifuges pour irrigation par écoulement
- **serie CS**  
centrifugal electric pumps for sliding irrigation
- **baureihe CS**  
Kreisel-Elektropumpen für Abflussbewässerung
- **serie CS**  
electrobombas centrifugas par regaduras por escurrimiento



# CENTRIFUGHE

centrifugal electric pumps

# ELETTROPOMPE