





DP 100

DPV 100 G

DP 80 G



per caratteristiche-varianti costruttive pag. 70 - for features schedule-constructural variances pag. 70

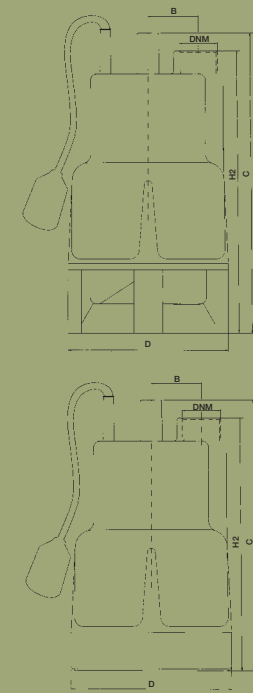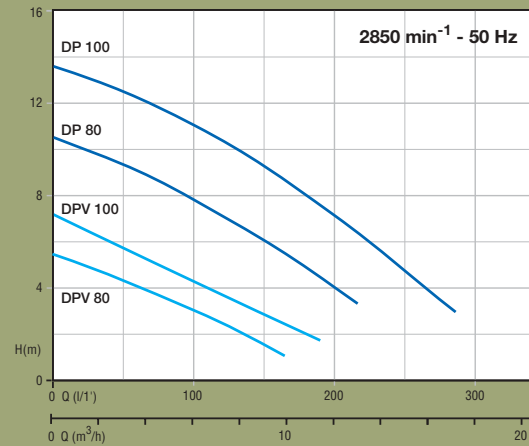

TIPO - TYPE		Pot. assorbita Puiss. absorbée Input power Leistungsaufnahme Pot. absorbida	AMPERE		Q = portata - débit - capacity - Fördermenge - Caudal						
Monofase Monophasé Single-phase Wechselstrom Monofásico 230 V - 50 Hz	Trifase Triphasé Three-phase Drehstrom Trifásico 230/400 V - 50 Hz	W	Monofase Monophasé Single-phase Wechselstrom Monofásico 1 x 230 V	Trifase Triphasé Three-phase Drehstrom Trifásico 3 x 400 V	m ³ /h	0	3	6	9	12	15
DP 80 G	-	800	3.7	-	10.3	9.1	7.8	6.3	4	-	-
DP 80	DPt 80	800	3.7	1.8	10.3	9.1	7.8	6.3	4	-	-
DPV 80 G	-	550	2.6	-	5.4	4.2	2.9	1.7	-	-	-
DPV 80	DPVt 80	550	2.6	1.2	5.4	4.2	2.9	1.7	-	-	-
DP 100 G	-	1050	5.1	-	13.3	12.2	10.9	9.3	7.3	4.5	-
DP 100	DPt 100	1050	5.1	2.3	13.3	12.2	10.9	9.3	7.3	4.5	-
DPV 100 G	-	750	3.8	-	7.4	5.8	4.7	2.7	-	-	-
DPV 100	DPVt 100	750	3.8	1.7	7.4	5.8	4.7	2.7	-	-	-


Prevalenza manometrica totale in m. - Total head in meters w.c.
Hauteur manométrique totale en m. - Total head in meters w.c.
Förderhöhe m. - Altura de impulsión manométrica total en m.

DP 80 G - DPV 80 G - DP 100 G - DPV 100 G: elettropompe complete di interruttore a galleggiante.
 DP 80 G - DPV 80 G - DP 100 G - DPV 100 G: electropompes avec contacteur à flotteur.
 DP 80 G - DPV 80 G - DP 100 G - DPV 100 G: electric pumps with floating switch.
 DP 80 G - DPV 80 G - DP 100 G - DPV 100 G: Elektropumpen ausgerüstet mit Schwimmschalter.
 DP 80 G - DPV 80 G - DP 100 G - DPV 100 G: electrobombas completa de interruptor con flotador.

TIPO TYPE	Dimensioni mm Dimensions mm Dimensions mm Masstabelle mm Dimensiones mm					Dimensioni imballo mm Dimensions d'emballage mm Packing dimensions mm Verpackungsmasse mm Dimensiones embalaje mm			Peso Poids Weight Gewicht Peso
	B	C	D	H2	DNM	I	L	M	Kg
DP 80 G	55.5	296	176	276	1" 1/4	185	230	310	8.5
DPV 80 G	55.5	331	176	310	1" 1/4	185	230	345	8.5
DP 100 G	55.5	296	176	276	1" 1/4	185	230	310	10
DPV 100 G	55.5	331	176	310	1" 1/4	185	230	345	10

Tutte le elettropompe sono complete di cavo elettrico di alimentazione lungo 10 m (H07 RN-F)
 Toutes les electropompes sont munies d'un cable électrique d'alimentation de 10 m de longueur (H07 RN-F)
 All electric pumps are equipped with 10 m electric cable (H07 RN-F)
 Alle Elektropumpen sind mit elektrisches kabel 10 meterlang ausgerüstet (H07 RN-F)
 Todas las electrobombas tienen un cable eléctrico de alimentación de 10 m (H07 RN-F)

- **serie DP**
elettropompe sommergibili
- **serie DP**
electropompes submersibles
- **serie DP**
submersible electric pumps
- **baureihe DP**
Tauchmotorelektropumpen
- **serie DP**
electrobombas sumergibles



PASSAGGIO CORPI SOLIDI: **DP max. Ø 4 mm**
 PASSAGE CORPS SOLIDES: **DPV max. Ø 15 mm**
 PASSAGE OF SOLIDS: **DPV max. Ø 15 mm**
 KORNGRÖSSE:
 PAJO DE SOLIDOS:

SOMMERGIBIL
submersible electric pumps

ELETTROPOMPE