




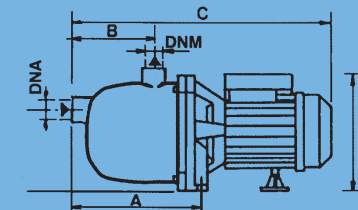

per caratteristiche-varianti costruttive pag. 70 - for features schedule-constructural variances pag. 70

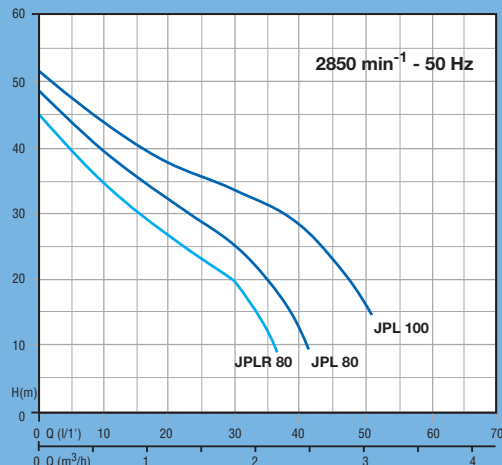


TIPO - TYPE		P <sub>2</sub> nom.		P <sub>1</sub> (kW) max.		AMPERE		Q = portata - débit - capacity - Fördermenge - caudal					
1 ~	3 ~	HP	kW	1 ~	3 ~	1 ~	3 ~	Prevalenza manometrica totale in m. C.A. Hauteur manométrique totale en m. - Total head in meters v.c. Förderhöhe m. - Altura de impulsión manométrica total en m.					
								230 V - 50 Hz	230/400 V - 50 Hz	1 x 230 V	3 x 400 V	m <sup>3</sup> /h 0.6	1.2
JPLR 80	JPLRt 80	0.8	0.59	0.78	0.79	3.6	1.3	35	27	20.5	11.5	-	-
JPL 80	JPLt 80	0.8	0.59	0.79	0.79	3.7	1.4	39.5	32	25	20.5	12.5	-
JPL 100	JPLt 100	1	0.74	0.98	1	4.6	2.2	44.5	37.5	32	29	27	15.5

TIPO TYPE	Dimensioni mm Dimensions mm Dimensions mm Masstabelle mm Dimensiones mm								Dimensioni imballo mm Dimensions d'emballage mm Packing dimensions mm Verpackungsmasse mm Dimensiones emballaje mm					Peso Poids Weight Gewicht Peso
	A	B	C	D	E	F	H1	H2	DNA	DNM	I	L	M	kg
JPLR 80	170	90	365	175	140	215	159	210	1" G	1" G	400	210	235	6.8
JPL 80	170	90	377	175	140	215	159	210	1" G	1" G	400	210	235	8
JPL 100	170	90	377	175	140	215	159	210	1" G	1" G	400	210	235	9

• serie JPL  
elettropompe autoadescanti  
1 girante



• serie JPL  
electropompes auto-amorçantes  
1 turbine




• serie JPL  
self priming electric pumps  
1 impeller



• baureihe JPL  
Selbstansaugende Elektropumpen  
1 Laufrad

• serie JPL  
electrobombas autocebantes  
1 rodete



**AUTOADESCANTI**  
self priming electric pumps

**ELETTROPOMPE**