



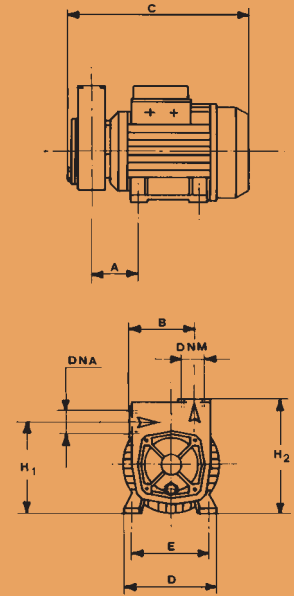

per caratteristiche-varianti costruttive pag. 70 - for features schedule-constructural variances pag. 70

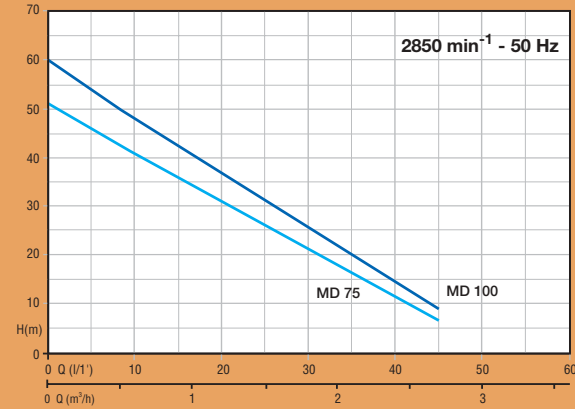

TIPO - TYPE		P ₂ nom.		P ₁ (kW) max.		AMPERE		Q = portata - débit - capacity - Fördermenge - caudal						
1 ~	3 ~	HP	kW	1 ~	3 ~	1 ~	3 ~	m³/h	0.3	0.6	1.2	1.8	2.4	2.7
230 V - 50 Hz	230/400 V - 50 Hz					1 x 230 V	3 x 400 V	l/1'	5	10	20	30	40	45
MD 75	MDt 75	0.8	0.59	1.03	0.94	5	1.7	46	41	31.5	21.5	11.5	6	
MD 100	MDt 100	1	0.74	1.17	0.98	5.4	2.1	53	48	37	25	13.5	9	

TIPO TYPE	Dimensioni mm Dimensions mm Dimensions mm Massstabelle mm Dimensiones mm							Dimensioni imballo mm Dimensions d'emballage mm Packing dimensions mm Verpackungsmasse mm Dimensiones embalaje mm					Peso Poids Weight Gewicht Peso
	A	B	C	D	E	H1	H2	DNA	DNM	I	L	M	Kg
MD 75	70	98.5	270	135	112	141	172	1"G	1"G	310	185	195	11.1
MD 100	70	98.5	270	135	112	141	172	1"G	1"G	310	185	195	11.6

• **serie MD**
elettropompe periferiche
autoadescanti




• **serie MD**
electropompes périphériques
autoamorçantes




• **serie MD**
self priming peripheral
electric pumps



• **baureihe MD**
Selbstansaugende
Peripherische Elektropumpen



• **serie MD**
electrobombas periféricas
autocebantes



PERIFERICA
peripheral electric pumps

ELETTROPOMPE