




Ratio **1:1**  
Capacity **40 lt/min**

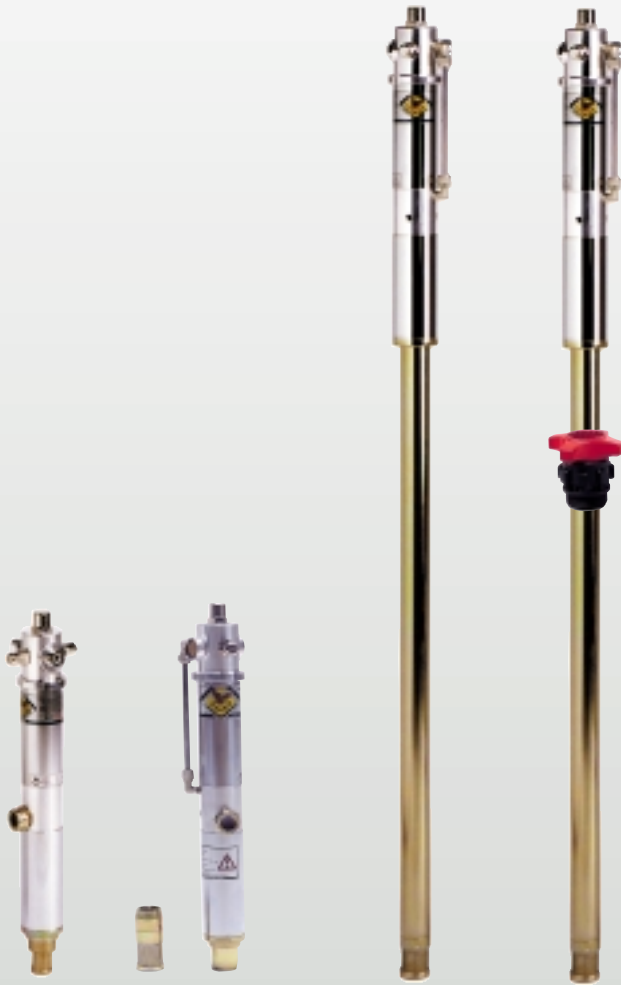

Art. 33160    Art. 33161    Art. 33194    Art. 33196

**Air-operated transfer pumps 40 l/min** suitable for transferring **low/medium viscosity** (density) liquids such as oil, depleted oil, antifreeze liquid and allied products **at short and medium distances**.

They are equipped with **special Teflon seals**.

**Art. 33160 Transfer pump 40 l/min** Ratio 1:1 for wall mounting (or fixed) **see page 66**

N° 1 packing     $m^3$  0,010    kg 5,3

**Art. 33161 Extensible pump 40 l/min** Ratio 1:1 complete with foot valve with filter **KR3308** applicable to the personalized suction tube. **see page 66**

N° 1 packing     $m^3$  0,010    kg 6

**Art. 33194 Transfer pump 40 l/min** Ratio 1:1 for 180/220 kg trade drums

N° 1 packing     $m^3$  0,020    kg 7,3

**Art. 33196 Transfer pump 40 l/min** Ratio 1:1 for 180/220 kg trade drums with pump bung adaptor (art. 38042)

N° 1 packing     $m^3$  0,020    kg 7,4

**WARNING:** Do not use flammable or corrosive liquids.

We recommend applying delivery hoses of min. 1/2", optimal 3/4".

N.B. The eventual application of a meter art.37701-37702-37711-37722 reduces the pump capacity to 13/15 litres max.


These pumps can only be coupled with meter 33701.

**Single- and double-acting**    see page 50-51

**Compression ratio**    see page 52

**Relative and real capacity**    see page 53

**Overall dimensions**

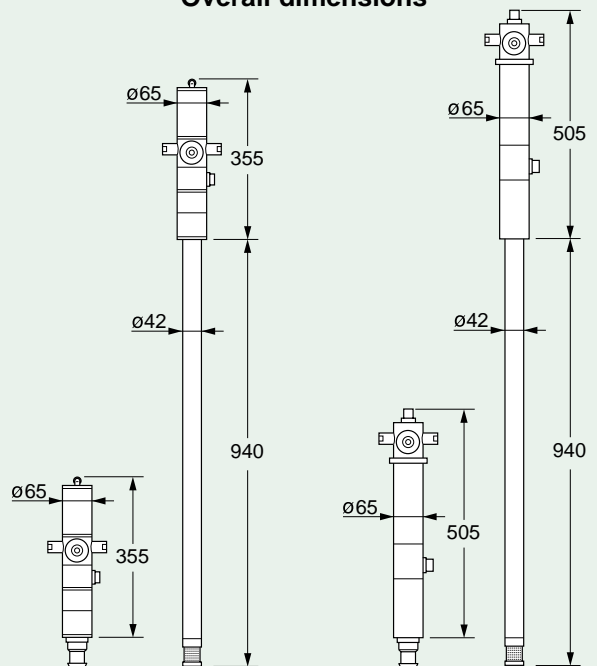

art. 33060 - 33094

art. 33160 - 33194