



CBt 1500






CBt 600



per caratteristiche-varianti costruttive pag. 70 - for features schedule-constructural variances pag. 70


TIPO - TYPE		P ₂ nom.	P ₁ (kW) max.	AMPERE		Q = portata - débit - capacity - Fördermenge - portata																		
1 ~	3 ~			1 ~	3 ~	Prevalenza manometrica totale in m. C.A. Hauteur manométrique totale en m. - Total head in meters w.c. Förderhöhe m. - Altura de impulsión manométrica total en m.																		
230 V - 50 Hz		HP	kW	1 x 230 V		3 x 400 V		m ³ /h	0	1.5	3	4.5	6	7.5	9	10.5	12	15	18	24	30	36		
230/400 V 50 Hz								l/s	0	25	50	75	100	125	150	175	200	250	300	400	500	600		
CB 100	CBt 100	1	0.74	1.17	1.15	5.4	2.4	44	41.5	37	22.5													
CB 150	CBt 150	1.5	1.1	1.85	1.85	8.8	3.4	54.5	53	49	39	31												
-	CBt 200	2.2	1.65	-	2.30	-	4.2	59	58.5	54	47	39	28											
-	CBt 300	3	2.2	-	2.85	-	5.2	66	65	61	54	46.5	36.5											
CB 400	CBt 400	4	3	4.35	4.5	21.5	7.6	66.9	63.9	63.3	61	58.4	55.2	51.5	47.8	44.2								
CB 600	CBt 600	5.5	4	5.6	5.45	27	9.5	78.7	77.1	76.1	74.6	72	69.4	66	62.4	58.7								
-	CBt 750	7.5	5.5	-	8.1	-	14.7	90	89	88.6	87	84.8	82.3	79.2	76.3	72.5	62.7							
-	CBt 800	7.5	5.5	-	8.85	-	15	77	76.5	75.7	74.9	74	73.5	73	71.2	70.5	66.4	62.8	51.6	36				
-	CBt 1000	10	7.5	-	10.35	-	17.2	86.4	86.1	85.8	85.3	84.8	84	83.2	81.5	80.7	77.7	74.3	65	51.1				
-	CBt 1250	12.5	9.2	-	11.1	-	18.9	93.6	93.1	92.5	91.8	91	90	88.9	87.6	86.3	83	79.7	70.5	55.2				
-	CBt 1500	15	11	-	12.1	-	20.4	98.7	98.6	98.5	98	97.6	97	96.4	95.3	94.2	91.5	87.6	78.2	62.3	40.9			

TIPO TYPE	Dimensioni mm Dimensions mm Dimensions mm Massstabelle mm Dimensiones mm						Dimensioni imballo mm Dimensions d'emballage mm Packing dimensions mm Verpackungsmasse mm Dimensiones embalaje mm						Peso Poids Weight Gewicht Peso
	A	B	C	D	E	H1	H2	DNA	DNM	I	L	M	
CB 100	122	73	328	180	140	98	228	1" G	1" G	350	195	265	15.3
CB 150	141	83	385	210	170	115	264	1 1/4 G	1" G	405	225	295	24
CB 200	141	83	385	210	170	115	264	1 1/4 G	1" G	405	225	295	23.4
CB 300	141	83	385	210	170	115	264	1 1/4 G	1" G	405	225	295	23.4
CB 400	145	95.5	463	266	212	135	305	1 1/2 G	1 1/4 G	500	275	350	41
CBt 600	145	95.5	463	266	212	135	305	1 1/2 G	1 1/4 G	500	275	350	44.8
CBt 750	145	95.5	480	266	212	135	305	1 1/2 G	1 1/4 G	500	275	350	50.5
CBt 800	190	120	605	275	210	150	330	2" G	1 1/4 G	640	310	370	70.5
CBt 1000	190	120	605	275	210	150	330	2" G	1 1/4 G	640	310	370	77
CBt 1250	190	120	645	275	210	150	330	2" G	1 1/4 G	640	310	370	85
CBt 1500	190	120	645	275	210	150	330	2" G	1 1/4 G	640	310	370	92

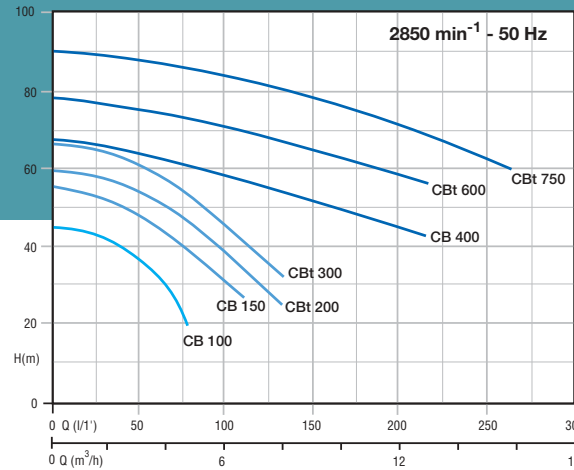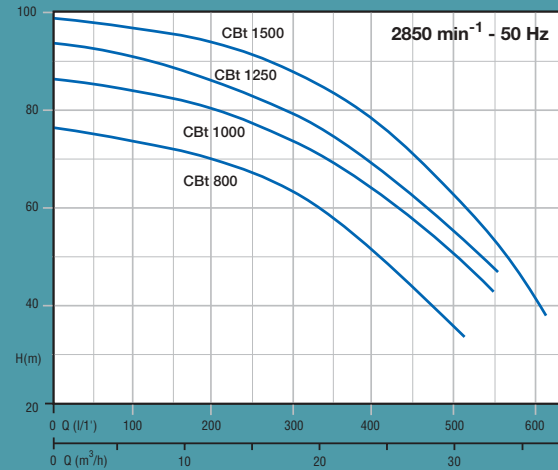

Dimensioni imballo
Dimensions d'emballage
Packing dimensions
Verpackungsmasse
Dimensiones embalaje


• **serie CB**
elettropompe centrifughe
2 granti



• **serie CB**
elettropompe centrifughe
2 turbine



• **serie CB**
centrifugal electric pumps
2 impellers



• **baureihe CB**
Kreisell-Elektropumpen
2 Laufräder

• **serie CB**
electrobombas centrifugas
2 rodetes

ELETTROPOMPE

MULTIGIRANTE

multistage electric pumps