



PM 45 Br



PM 45 A





CP 75




PM 80




per caratteristiche-varianti costruttive pag. 70 - for features schedule-constructural variances pag. 70

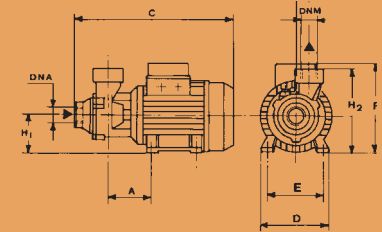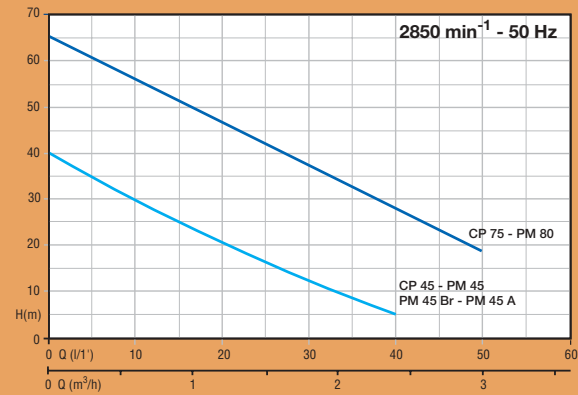

PM 45 (Br) - PM 80



CP 45 - CP 75

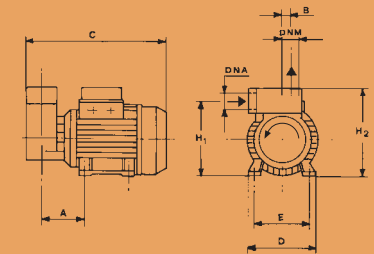

PM 45 A

TIPO - TYPE		P <sub>2</sub> nom.		P <sub>1</sub> (kW) max.		AMPERE		Q = portata - débit - capacity - Fördermenge - caudal						
1 ~	3 ~	HP	kW	1 ~	3 ~	1 ~	3 ~	m <sup>3</sup> /h	0.3	0.6	1.2	1.8	2.4	3
230 V - 50 Hz	230/400 V - 50 Hz			1 ~	3 ~	1 x 230 V	3 x 400 V	l/1'	5	10	20	30	40	50
<b>PM 45</b>	<b>PMt 45</b>	0.5	0.37	0.49	0.5	2.3	1	35	30	21	13	5	-	-
<b>PM 45 Br</b>	<b>PMt 45 Br</b>	0.5	0.37	0.49	0.5	2.3	1	35	30	21	13	5	-	-
<b>PM 45 A</b>	<b>PMt 45 A</b>	0.5	0.37	0.49	0.5	2.3	1	35	30	21	13	5	-	-
<b>CP 45</b>	<b>CPt 45</b>	0.5	0.37	0.49	0.5	2.3	1	35	30	21	13	5	-	-
<b>PM 80</b>	<b>PMt 80</b>	1	0.74	1.11	1.11	5.2	2	61	56	48	39	31	18	-
<b>CP 75</b>	<b>CPt 75</b>	1	0.74	1.11	1.13	5.2	2	61	56	48	39	31	18	-

PM 45 Br: elettropompa periferica con corpo e supporto pompa-motore in bronzo / electropompe periferique avec corps et support pompe-moteur en bronze / peripheral electric pump with bronze pump body and motor bracket / Periferische Elektropumpen mit Pumpengehäuse und Zwischensupport aus Bronze / electrobomba periferica con cuerpo y soporte bomba-motor bronza.  
 PM 45 A: elettropompa periferica autoadescente / electropompe periferique autoamorçante / self priming peripheral electric pump / Selbstansaugende Periferische Elektropumpen / electrobomba periferica autocebada.

TIPO TYPE	Dimensioni mm Dimensions mm Dimensions mm Massaballe mm Dimensiones mm						Dimensioni imballo mm Dimensions d'emballage mm Packing dimensions mm Verpackungsmasse mm Dimensiones embalaje mm						Peso Poids Weight Gewicht Peso	
	A	B	C	D	E	F	H1	H2	DNA	DNM	I	L		M
<b>PM 45 (Br)</b>	67	20	265	125	100	155	63	143	1" G	1" G	265	145	165	5.7
<b>PM 45 A</b>	62	20	238	125	100	184	150	184	1" G	1" G	310	185	195	6
<b>CP 45</b>	67	60	235	125	100	155	103	138	1" G	1" G	265	145	165	5.6
<b>PM 80</b>	71.5	60	290	138	112	172	121	156	1" G	1" G	310	185	195	9.5
<b>CP 75</b>	71.5	60	260	138	112	172	121	156	1" G	1" G	310	185	195	9.5

• serie **CP/PM**

elettropompe periferiche



• serie **CP/PM**

elettropompe periferiques




• serie **CP/PM**

periferical electric pumps




• baureihe **CP/PM**

Periferische Elektropumpen



• serie **CP/PM**

electrobombas perifericas



**PERIFERICHE** periferical electric pumps